


ABYSS CANISTER TECHNICAL BULLETIN

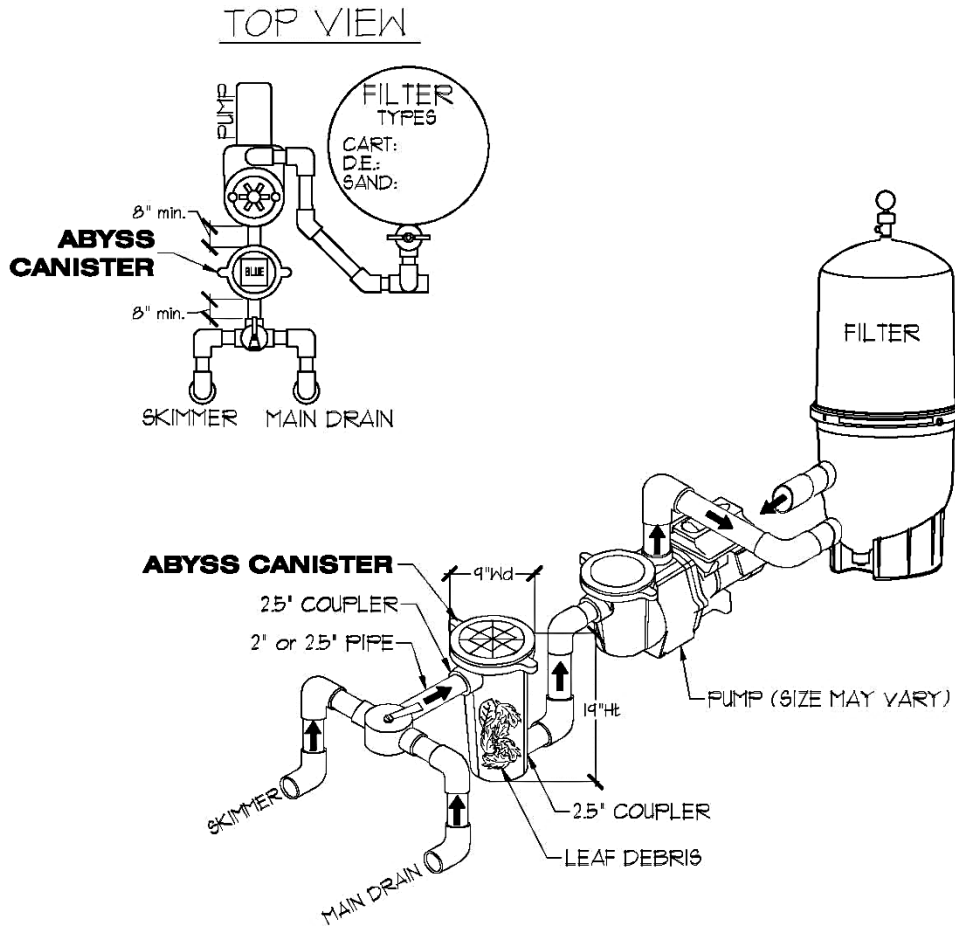

CAUTION: The Abyss canister must be plumbed between the pump and any suction side valves in order to prevent excessive water surges and pressures

NOTE: Plumb the Abyss canister so lid is at the same elevation as the pump lid
Use 2" or 2.5" plumbing

GLUE SPECIFICATON: Use Weldon 750 or a Red Hot Blue Glue for optimal results